

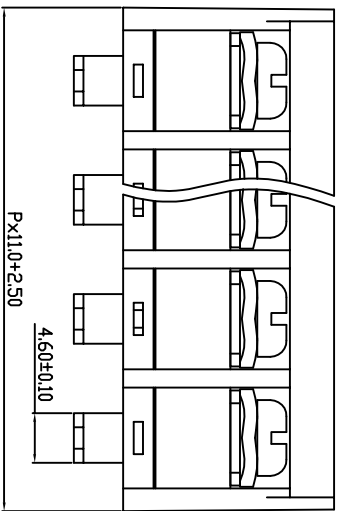
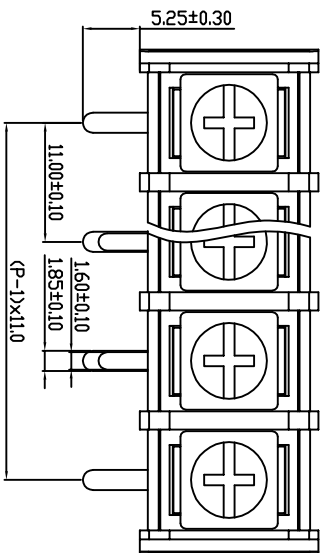


linear dimension (Tolerances Standard GB/T 14486-2008)	—										□	⊥
variable range	6 to 6	over 10 to 10	over 30 to 30	over 60 to 60	over 100 to 100	over 160 to 160	over 10 to 10	over 100 to 100	over 100 to 100	over 100 to 100	over 100 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

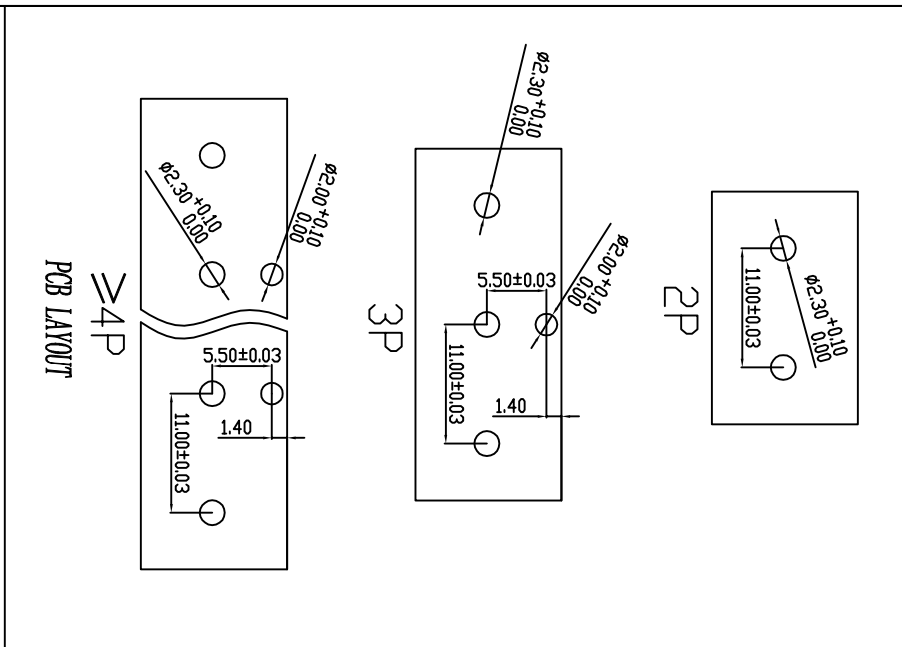

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED DATE

UL/CUL 技术参数			
UL/CUL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage	V	600 600
额定电流	Rated Current	A	30 30
接线范围	Wire Range	18-10	
单/多芯线	Solid/Stranded	AWG	
耐电压	Withstanding Voltage	2200V/Min	

IEC 技术参数			
IEC Technical Data			
过电压类别	Overvoltage Category	III	III II
污染等级	Contamination Class	3	2 2
额定电压	Rated Voltage	V	400 630 800
额定电流	Rated Current	A	32 32 32
额定冲击电压	Impulse withstand voltage	kV	6 6 6
导线截面积	Conductor cross section	mm ²	4
硬质/柔性导线	Solid/flexible		

材料		Material
绝缘材料	Insulation Material	PA66
阻燃等级	Inflammability	UL94V-0
导体材料	Conductor Material	铜合金 Copper alloy
导体表面镀层	Conductive Coating	镀锡 Tin Plated
一般参数 Other Data		
间距 Pitch	mm	11.0
极数 Poles	p	02-24
剥线长度 Stripping Length	mm	12
螺丝 Screw/扭矩 Torque(Max)	N.m	M4/1.2
工作温度 Operating temperatur	°C	-40~105
引脚尺寸 Pin Dimensions	mm	5.25
PCB板孔径 PCB Hole Diameter	mm	2.0±2.3

DES.	DATE	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	DATE	APP.	DATE	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD						
名称 / TITLE			KF62R-11.0							